


ECM100 NEW

Embedded Chassis for Mini-ITX SBC

Features

- Designed for Mini-ITX SBC
- Two 2.5" HDD drive bays
- Optional 250W AC-in power supply
- Wall mount kit supported
- Slim design with 1 system fan
- Easy and quick customization

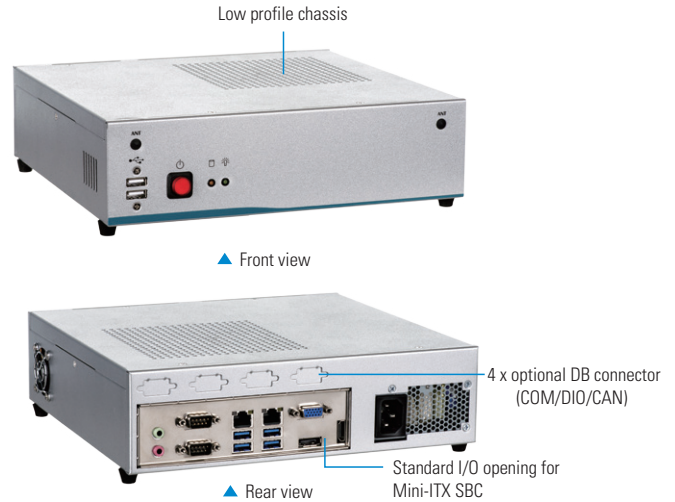

Specifications

| | |
|---------------------|---|
| Standard Color | Silver |
| Construction | Heavy-duty cold-rolled steel |
| Indicator | 1 x green LED for system power-on 1 x orange LED for HDD active |
| Front Panel I/O | 1 x ATX power button 2 x USB 2.0 2 x SMA type connector opening for Antenna |
| Rear Panel I/O | 1 x standard Mini-ITX I/O bracket space 4 x optional DB connector (COM/DIO/CAN) |
| Expansion Interface | N/A |
| Drive Capacity | 2 x 2.5" HDD (max. 9.5 mm height) |
| Cooling | 40 x 40 mm system fan |
| Power Supply | ATX 250W Input: AC 115 ~ 230V Output: +3.3V @ 10A, +5V @ 10A, +12V @ 8.5A, -12V @ 0.4A, +5VSB @ 1A |
| Dimensions | 265 mm (10.43") (W) x 250 mm (9.84") (D) x 71.5 mm (2.81") |
| Environment | EMI pre-scan meets EN 55022 Class A |

Applications

Factory automation
Embedded controller
Machine vision system
IIoT gateway
Compact industrial PC

Ordering Information

| Standard | |
|----------------------|-----------------------------------|
| ECM100 | Embedded chassis for Mini-ITX SBC |
| SBC Options | |
| MAN0500 | |
| Optional | |
| 250W AC power supply | |
| Wall mount kit | |
| Power cord | |
| RS-232 cable | |

*Specifications and certifications may vary according to various options.

Dimensions

